



REV	ECN NO OR DESCRIPTION	REVISION	DATE
1	REVISION NOTE	JACK	4/9-09'




0.80±0.10

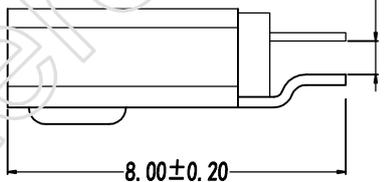


0.8±0.05

8.00±0.20

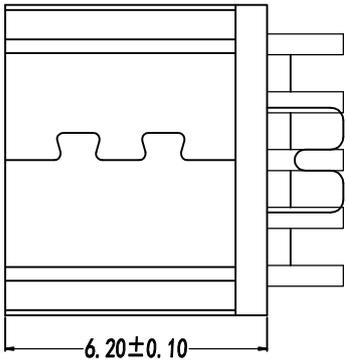

6.20±0.10

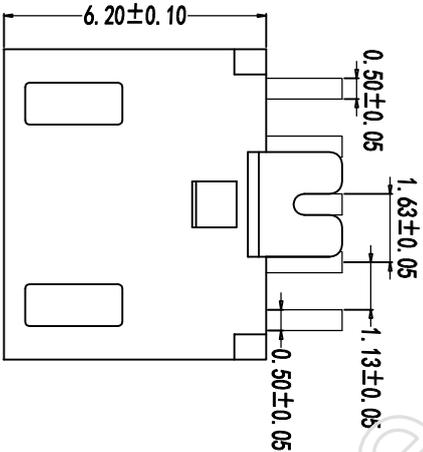


6.20±0.10

0.50±0.05

1.63±0.05

1.13±0.05

0.50±0.05



6.90±0.05

1.85±0.05

- 备注:
- 产品规格:
 - 1-1. 插入力: 35N MAX.
 - 1-2. 拔出力: 10N MIN. INITIAL 8-20N AFTER 3000 CYCLES
 - 1-3. 额定电流: 1.0A
 - 1-4. 额定电压: 30V
 - 1-5. 耐久性: 3000 CYCLES MIN.
 - 1-6. 耐电压: 100V AC MIN.
 - 1-7. 接触阻抗: 30mΩ MAX. INITIAL; 40mΩ MAX AFTER 3000 CYCLES
 - 1-8. 绝缘电阻: 100MΩ MIN
 - 1-9. 工作温度: -30° TO +80°
 - 所用材质须符合RoHS要求
 - 重点尺寸标识"▲"符号

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
C	SHELL	1	C2680R-H	表面镀锌100μ
B	CONTACT	5	C2680R-H	镀金, 镀金1μ
A	HOUSING	1	LCF U94N-0	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

3G ENTERPRISE LIMITED

DECIMALS:	ANGLES:	TITLE	MICRO USB B TYPE 5P/F 焊锡夹板0.8凸包无边
X : ±0.50	X : ±1.00°	DWN	JACK
X.X : ±0.20		CHKD	SCALE: 1/1 UNIT: mm
X.XX : ±0.10		APVD	SIZE: A3 SHEET: 10F 1 REV:A
X.XXX : ±0.03		CUSTOMER COPY	

1 2 3 4 5 6 7 8