

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE


NOTE:

- ELECTRICAL
 - CURRENT RATING: 1.0 AMP.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.
 - INSULATION RESISTANCE: 500MQ MIN.
 - CONTACT RESISTANCE: 30mΩ MAX.
- ENVIRONMENTAL
 - TEMPERATURE RANGE: -25°C TO +85°C.
- PART NO. 2FP-1035-H□□


4-3SPIN

■ DIMENSION TABLE

pin	A	B	C	pin	A	B	C
4	3	5.1	7.0	20	19	21.1	23.0
5	4	6.1	8.0	21	20	22.1	24.0
6	5	7.1	9.0	22	21	23.1	25.0
7	6	8.1	10.0	23	22	24.1	26.0
8	7	9.1	11.0	24	23	25.1	27.0
9	8	10.1	12.0	25	24	26.1	28.0
10	9	11.1	13.0	26	25	27.1	29.0
11	10	12.1	14.0	27	26	28.1	30.0
12	11	13.1	15.0	28	27	29.1	31.0
13	12	14.1	16.0	29	30	30.1	32.0
14	13	15.1	17.0	30	29	31.1	33.0
15	14	16.1	18.0	31	30	32.1	34.0
16	15	17.1	19.0	32	31	33.1	35.0
17	16	18.1	20.0	33	32	34.1	36.0
18	17	19.1	21.0	34	33	35.1	37.0
19	18	20.1	22.0	35	34	36.1	38.0

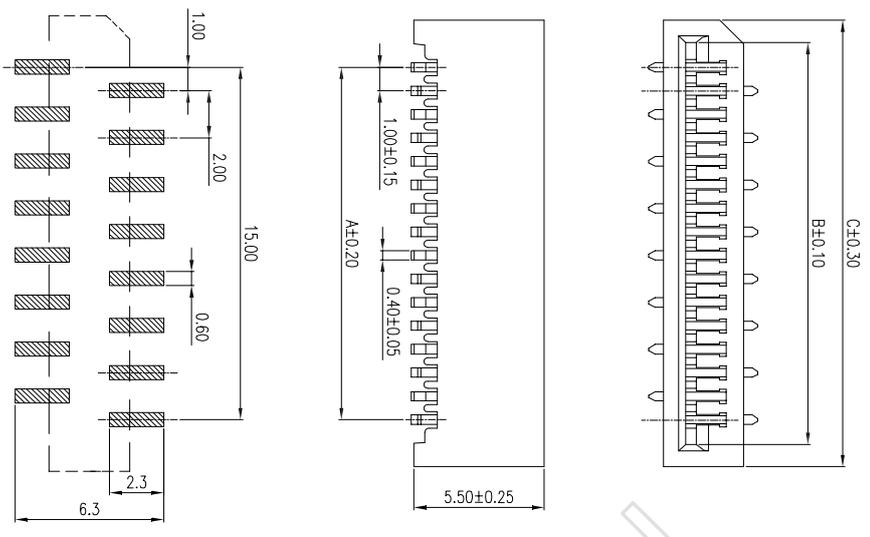

RECOMMENDED PCB LAYOUT

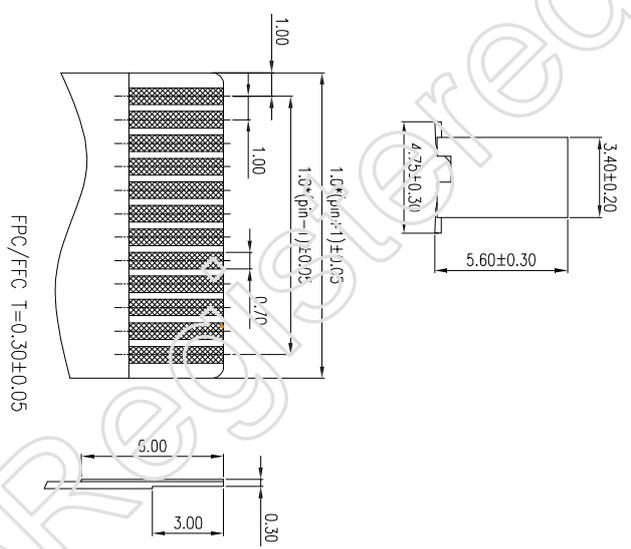

FPC/FPC T=0.30±0.05

B	CONTACT	4-35	COPPER ALLOY	TIN PLATED OVER NICKEL
A	HOUSING	1	GLASS-REINFORCED THERMOPLASTIC UL 94V-0	BLACK
UNLESS OTHERWISE SPECIFIED TOLERANCES		QTY	MATERIAL	PLATING & COLOR
3G ENTERPRISE LIMITED				
FPC 1.0 PITCH SMT				
DECIMALS:		ANGLES:	TITLE	
X	:±0.30		DWN	JACK
X.X	:±0.20		CHKD	SCALE:
X.XX	:±0.10		APVD	UNIT: mm
X.XXX	:±0.05		SIZE: A3 SHEET: 10F 1 REV: A	
CUSTOMER COPY				