

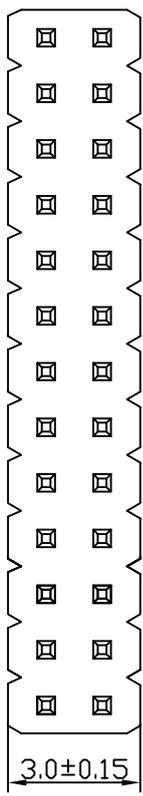



| REV. | ECN NO OR DESCRIPTION | REVISED | DATE |
|------|-----------------------|---------|------|
| | | | |

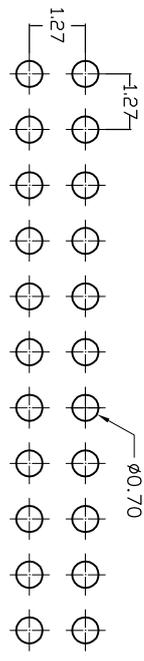

SPECIFICATIONS
 Current Rating :1AMP
 Operation Temperature:-40°C to+105°C
 Contact Resistance :20mΩ Max.
 Insulation Resistance:1000MΩ Min.
 Withstanding Voltage :AC 500V

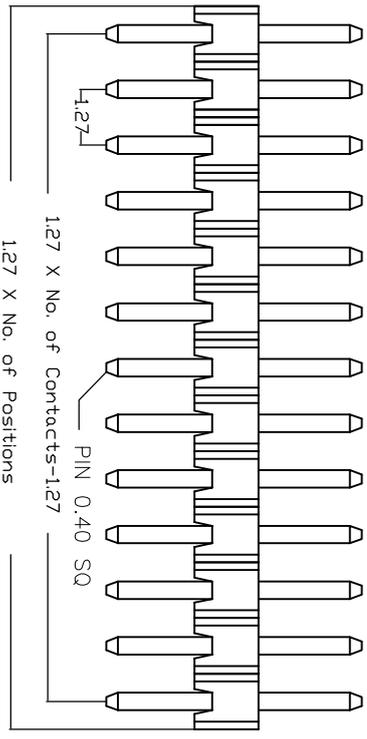

PCB LAYOUT



| NO | DESCRIPTION | QTY | MATERIAL | PLATING & COLOR |
|----|-------------|------|---------------------------------------|-----------------------|
| B | CONTACT | 1-13 | Brass | Au or Sn Over 50u" NI |
| A | HOUSING | 1 | Polyester(UL 94V-0) Standard/Nylon-6T | BLACK |

UNLESS OTHERWISE SPECIFIED TOLERANCES

| DECIMALS: | ANGLES: | TITLE |
|-------------|---------|-----------------------------------|
| X :±0.35 | | PH1.27*1.6 双排 S/T |
| X :±0.25 | | DWN JACK PART NO:2PT-1276-10□ |
| .XX :±0.20 | | CHKD SCALE: UNIT: mm |
| .XXX :±0.15 | | APVD SIZE: A3 SHEET: 10F 1 REV: A |

CUSTOMER COPY

3G ENTERPRISE LIMITED