
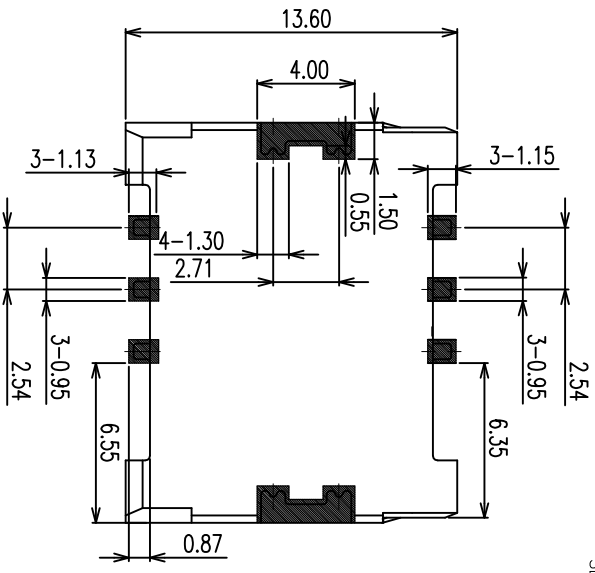


SECTION A-A

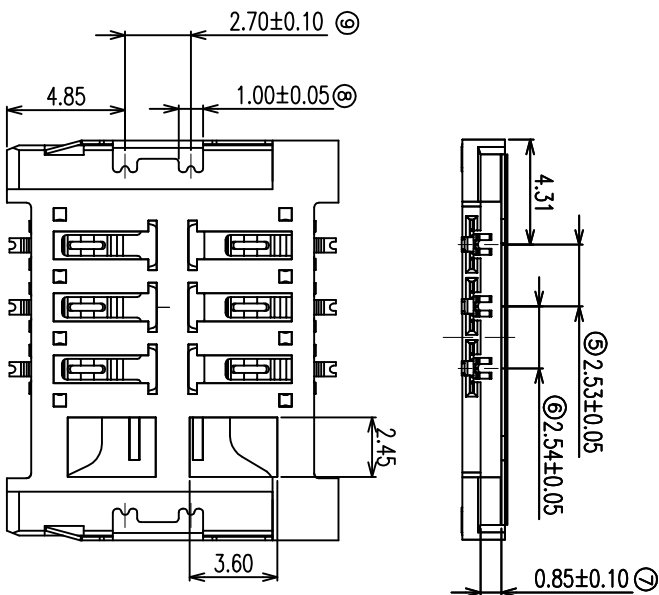

- NOTES:
- MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC FLAMMABILITY RATING UL94V-0
 - 1.2 CONTACT: COPPER ALLOY T=0.12mm
 - 1.3 SHELL: STAINLESS STEEL T=0.15mm
 - FINISH:
 - 2.1 CONTACT: PLATED ON CONTACT AREA
30~Min Au
G/F PLATING ON SOLDER TAIL AREA
50~80u" NICKEL UNDERPLATING OVERALL
 - 2.2 SHELL
G/F PLATED ON SOLDER TAIL AREA
50~80u" Ni PLATED UNDER.
 - SPECIFICATION:
 - 3.1 CURRENT RATING: 0.5 A MAX.
 - 3.2 VOLTAGE: 100 VAC
 - 3.3 TEMPERATURE RANGE: -55 °C ~ 85 °C
 - 3.4 CONTACT RESISTANCE: 50 MILLIONHM MAX.
 - 3.5 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC r.m.s
 - 3.6 INSULATION RESISTANCE: 1000 MEGOHMS MIN

GENERAL TOLERANCE		DWG NO.	APPD:		WMD	Scale
X.±0.45	X.±1.5'	JYS10525-009	CHKD:			1:1
.X±0.35	.X.±2'	1.8H SIM CARD 6PIN 连接器无档 (防游PIN)	DR:			UNIT
.XX±0.25	.XX.±1'	JYS-SIM180-104B	Date	2016/11/29		mm
.XXX±0.15	.xxx±0.5'	Part NO.				
SHEET 1/1						

杰宇森电子有限公司
JIE YU SEN ELECTRONIC CO., LTD.