
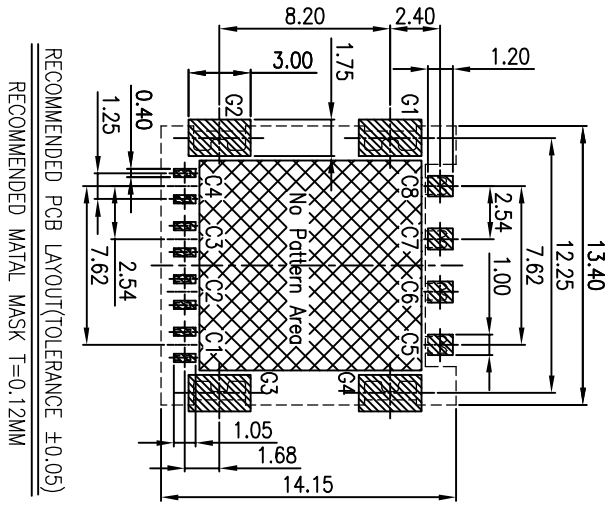


PIN No.	DESCRIPTION
C1	VCC (SUPPLY VOLTAGE)
C2	RST (RESET SIGNAL)
C3	CLK (CLOCK SIGNAL)
C4	RESERVED
C5	GND
C6	VPP (VARIABLE SUPPLY VOLTAGE)
C7	I/O (DATA INPUT/OUTPUT)
C8	RESERVED
G1~G4	GND



RECOMMENDED PCB LAYOUT(TOLERANCE ±0.05)
 RECOMMENDED METAL MASK T=0.12MM

- NOTES:
- MATERIAL:
 - SHELL:STAINLESS STEEL
 - HOUSING:THERMOPLASTIC,UL94V-0,COLOR:BLACK
 - TERMINAL:COPPER ALLOY
 - SPECIALTY:
 - RATED CURRENT:1.0A
 - RATED VOLTAGE:30V
 - CONTACT RESISTANCE:30MΩ MAX
 - INSULATION RESISTANCE:100MΩ MIN 500V DC
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V DC.
 - SOLDER ABILITY:250±5℃, 10±0.5S.
 - DURABILITY:5000 CYCLES MIN.CONTACT RESISTANCE100MΩMAX
 - OPERATING CONDITION:TEMPERATURE-40℃~+85℃; HUMIDITY 80% R.H MAX

GENERAL TOLERANCE		DWG NO.	JYSA1107-001	APPD:	WIND	Scale	1:1
X.±0.45	x.±1.5'	Title	8PIN MICRO SIM CARD HL.50	CHKD:		UNIT	mm
X.±0.35	x.±1.2'	Part No.	JYS-SIM150-072	Date	2012/02/29		
XX±0.25	.xx±1'						
XXX±0.15	.xxx±0.5'						
SHEET 1/1							

JIE YU SEN 杰宇森 电子有限公司
 JIE YU SEN ELECTRONIC CO., LTD.

REV.	ECH.NO.	MODIFY CONTENT	DATE
A		NEW	2012/02/29