


RECOMMEND PCB LAYOUT
TOLERANCE : ±0.05

NOTES:

1. MATERIAL:
 - 1.1 Housing:High Temperature Thermoplastic
 - UL94V-0; Color Black.
 - 1.2 Terminal:Copper Alloy.
 - 1.3 Stator:Stainless Steel.
2. SPECIALTY:
 - 2.1 Rated current:2.0A
 - 2.2 Rated voltage:30V
 - 2.3 Contact Resistance:50mΩ MAX
 - 2.4 Insulation Resistance:1000MΩ MIN 500V DC
 - 2.5 Dielectric withstanding voltage: 500V AC.
 - 2.6 Solder ability:255±5s; 5±0.5s.
 - 2.7 Durability:5000 Cycles Min.
 - 2.8 Operating condition:Temperature: -40~+85℃
Humidity: 80% R.H MAX

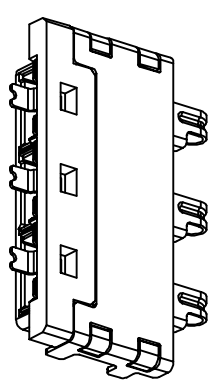

GENERAL TOLERANCE		DWG NO.	JYSA1126-02	APPD:	WIND	Scale	1:1
X±0.25	X'±40'	Title	3PIN BATTERY CONN	CHKD:	UNIT	mm	
X±0.20	X'±30'	DR:	H2,40mm D TYPE	Date	2013/07/29		
.XX±0.15	.XX'±20'	Part NO.	JYS-BY240-102				
XXX±0.10	.xxx±15'						
SHEET	1/1						

JYS 杰宇森电子有限公司
JIE YU SEN ELECTRONIC CO., LTD.

REV.	ECN NO.	MODIFY CONTENT	DATE
A		NEW	2013/07/29