
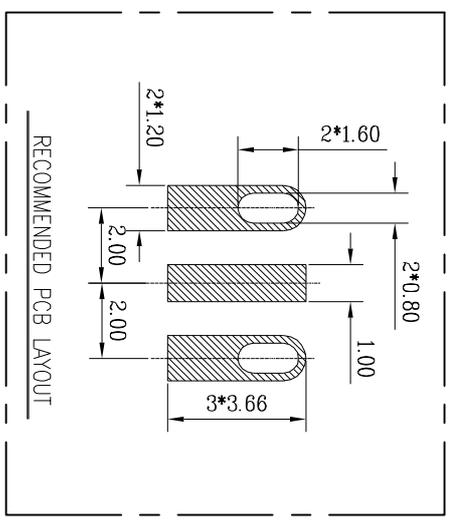
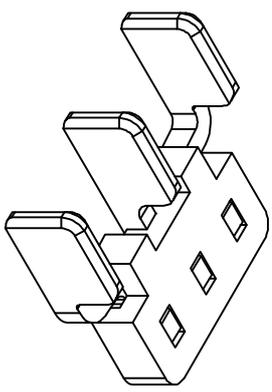
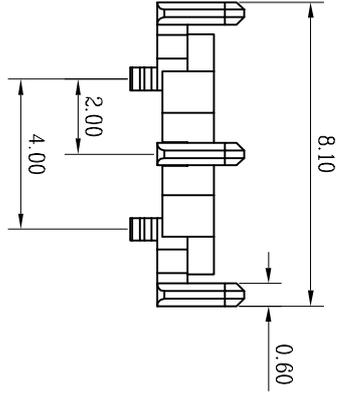
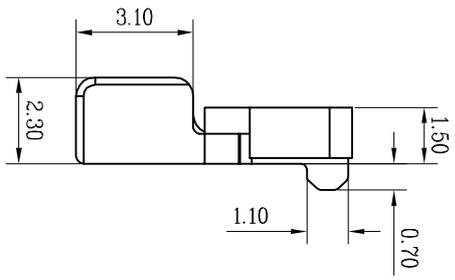


REV.	EON.NO.	MODIFY CONTENT	DATE
A		NEW	2011/10/31

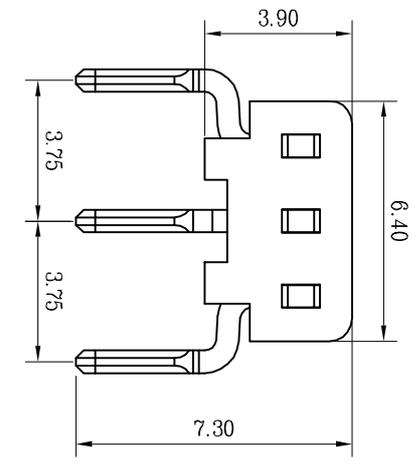

- NOTES:
1. CONTACT CURRENT RATING: 1.0A.
 2. CONTACT RESISTANCE: 50 mΩ MAX.;
 3. INSULATION RESISTANCE: 1000Ω MIN.;
 4. DIELECTRIC WITHSTANDING: 300V AC MIN.;
 5. DURABILITY: 5,000 CYCLES MIN.;
 6. CONNECTOR MATING FORCES: 29.8N (3.00kgf) MAX.;
 7. CONNECTOR UNMATING FORCES: 3N(0.31kgf) MIN.;
 8. PRODUCT MEET THE REQUEST OF THE ROHS, SEE TABLE A:

TABLE A:

MATTER	RoHS (PPM)
Cd	≤ 100
Pb	≤ 1000
Hg	≤ 1000
Cr6+	≤ 1000
PBB	≤ 1000
PBDE	≤ 1000

ITEM	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
②	HOUSING	1	LCF+30%GF		BLACK
①	CONTACT 1	3	PHONPHOR BRONZE 0.60T	Gold Flash	

GENERAL TOLERANCE		DWG NO.	JYSA0511-001	APPD:	WMD	Scale	1:1
X.±0.45	X.±5°	Title	BATTERY 3PIN CONNECTOR H2.3 T=0.6 (MIXA 6500)	CHKD:		UNIT	mm
X.±0.35	X.±2°	Part No.	JYS-BY230-097	DR:		Date	2013/02/29
.XX±0.25	.XX±1°						
.XXX±0.15	.xxx±0.5°						
SHEET	1/1						


 杰宇森电子有限公司
 JIE YU SEN ELECTRONIC CO., LTD.