






REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2019/10/31

NOTES:



- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 mΩ MAX.;
- INSULATION RESISTANCE: 1000Ω MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
- CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;
- PRODUCT MEET THE REQUEST OF THE RoHs, SEE TABLE A:




3D VIEW

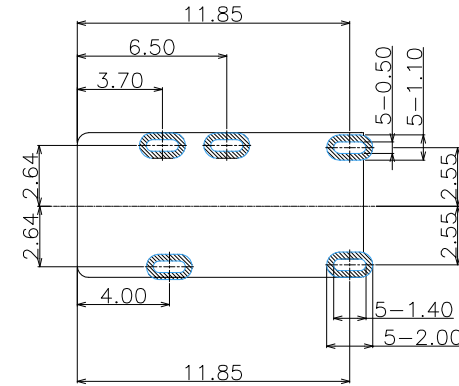

RECOMMEND FPC LAYOUT
TOLERANCE :±0.05



PLUG MATE DRAWING

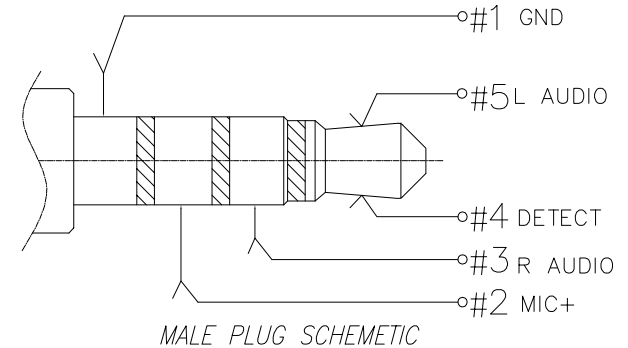

MALE PLUG SCHEMATIC

GENERAL TOLERANCE		DWG NO.	JYSA0528-001	APPD:	WIND	Scale	1:1
X.±0.45	x.*±5'	Title	ø3.5 5PIN 斜口 3.8H DIP PHONE JACK	CHKD:		UNIT	mm
.X±0.35	.x'*±2'			DR:			
.XX±0.25	.xx'*±1'	Part NO.	JYS-JK380-043	Date	2019/10/31		
.XXX±0.15	.xxx'*±0.5'						
SHEET	1/1						