

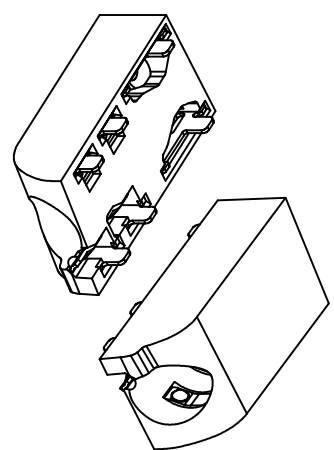
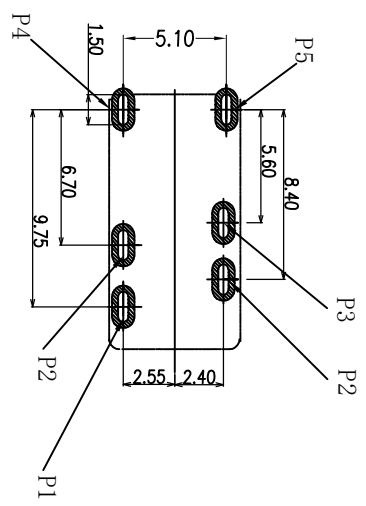
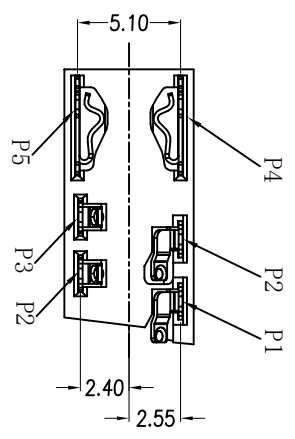



REV.	ECH. NO.	MODIFY CONTENT	DATE
A		NEW	2019/10/21



NOTE:
 一. 材质及电镀方式 (MATERIAL AND FINISH)
 1. 塑胶 (HOUSING): PA9T, UL 94V-0, COLOR: BLACK
 2. 端子 (CONTACT): COPPER ALLOY
 GOLD FLASH PLATING ON CONTACT AREA,
 GOLD FLASH PLATING ON SOLDER TAILS
 40u" NICKEL UNDER PLATING OVER ALL

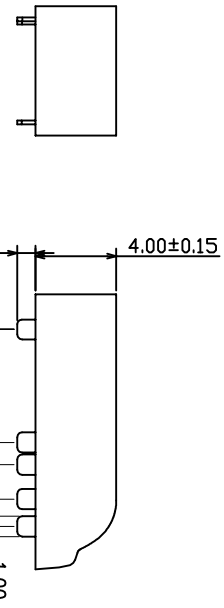

RECOMMENDED PCB LAYOUT
 TOLERANCE=±0.05

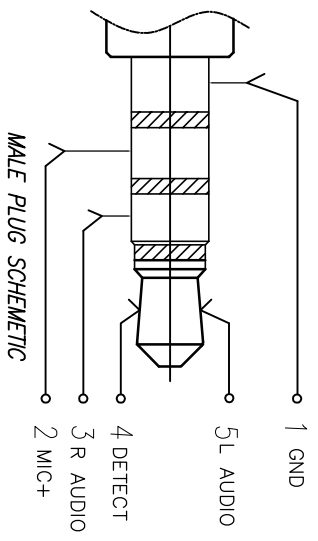

二. 机械特性 (MECHANICAL CHARACTERISTICS)
 1. 插入力 (Insertion Force): 2.5Kgf Max
 2. 拔出力 (Withdrawal Force): 0.25Kgf Min
 3. 耐久性 (Durability): 5000次

三. 电气特性
 1. 额定电流 (Current rating): 1.0A AC/DC
 2. 接触电阻 (Contact resistance): 100mΩ MAX
 3. 绝缘电阻 (Insulation resistance): 500MΩ MIN
 4. 适用温度 (Operating temperature): -20℃~65℃

GENERAL TOLERANCE		DWG NO.	APPD.	WIND	Scale
X.±0.45	X.±5°	JYSA0528-001			1:1
X.±0.35	X.±2°	Title ø3.5 6PIN 斜口 4.0H 全插 PHONE JACK	CHKD:		mm
.XX±0.25	.XX'±1°		DR:		
.XXX±0.15	.xxx'±0.5°	Part NO. JYS-JK400-046	Ddle	2019/10/21	
SHEET 1/1					

JYSCONN Shenzhen
 JYSCONN Electronics Co., LTD.