


Note:

1. Material:

- 1.1 Housing: High temperature thermoplastic with g.f, UL94v-0
- 1.2 Contact: copper alloy, t=0.15mm
- 1.3 Shell: SPCC, t=0.25mm

2. Specification:

- 2.1 Current rating: 1,5PIN 1.0A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 50 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30°C~80°C

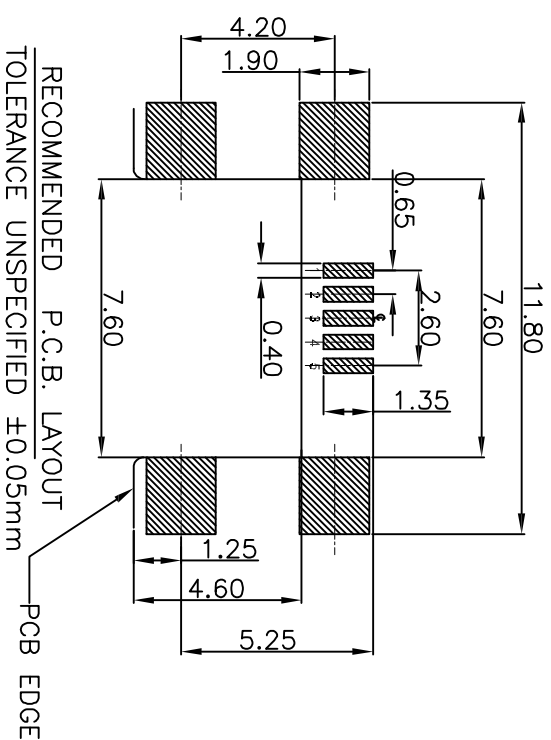

GENERAL TOLERANCE		DWG NO.	JYSA0508-001	APPD:	WIND	Scale	1:1
X±0.45	X:±5°	Title	MICRO USB SPIN 流線1.17mm 四脚插座 翻邊	CHKD:		UNIT	mm
X±0.35	X:±2°			DR:			
XX±0.25	.XX'±1°	Part NO.	JYS-USB117-047	Date	2013/03/29		
.XXX±0.15	.xxx'±0.5°						
SHEET	1/1						

REV.	EGN.NO.	MODIFY/CONTENT	DATE
A		NEW	2013/3/29