
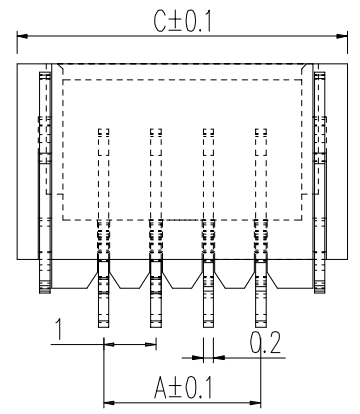
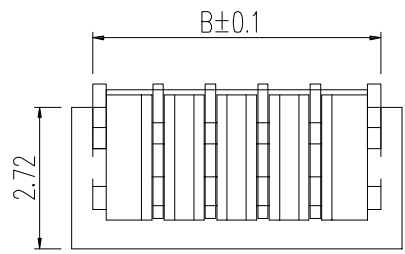
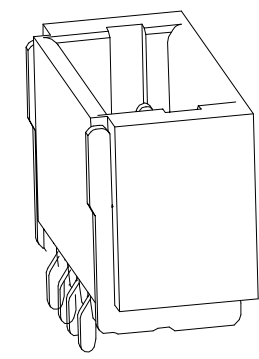
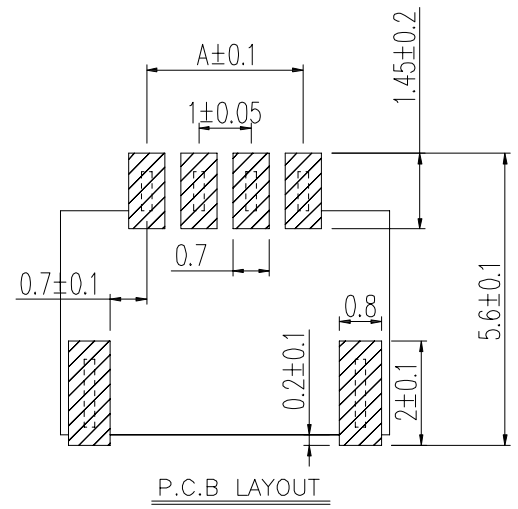


REV.	ECN.NO.	MODIFY.CONTENT	DATE
AO		NEW	2017/10/18



Specifications / 技术规格

Current rating: 0.5A  
 额定电流: 0.5A  
 Voltage rating: 50V AC,DC  
 额定电压: 50V AC,DC  
 Insulation Resistance: 100 MΩ Min.  
 绝缘电阻: 最小100MΩ  
 Dielectric Withstanding: 500V AC 1Min  
 耐压: 500V AC 1分钟  
 Contact Resistance: 20mΩ Max.  
 接触电阻: 最大20MΩ  
 Operating Temperature: -25°C to +85°C  
 工作温度: -25° C到85° C

Materials / 材料:  
 Contact Material: Bronze(Sn plating)  
 接触铜针材料: 磷铜 (镀锡)  
 Soldering Terminal: Bronze(Sn plating)  
 焊片材料: 磷铜 (镀锡)  
 Insulation Material: LCP UL94V-0  
 绝缘体材料: LCP UL94 V-0

孔数	型号	尺寸 ( mm )		
		A	B	C
2	JYS-WFW1.0-002	1.0	3.5	4.3
3	JYS-WFW1.0-003	2.0	4.5	5.3
4	JYS-WFW1.0-004	3.0	5.5	6.3
5	JYS-WFW1.0-005	4.0	6.5	7.3
...	....	...	...	...
16	JYS-WFW1.0-016	15.0	17.5	18.3

GENERAL TOLERANCE		DWG NO.	JYSA20171018	APPD:	WIND	Scale	1:1
X.±0.45	x.°±5°	Title	WAFER 1. OPH 卧贴	CHKD:		UNIT	mm
.X±0.35	.x°±2°			DR:		Date	2017/10/18
.XX±0.25	.xx°±1°	Part NO.					
.XXX±0.15	.xxx°±0.5°	Shenzhen		JYSCONN Electronics Co., LTD.			
SHEET	1/1						