
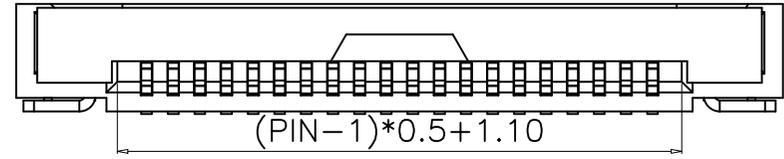
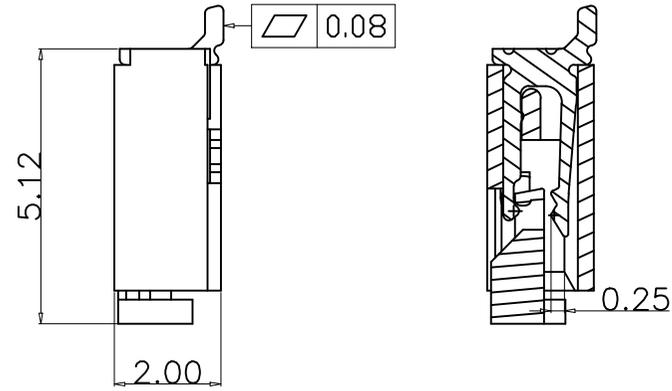


REV.	ECN. NO.	MODIFY. CONTENT	DATE
A		NEW	2018/03/29

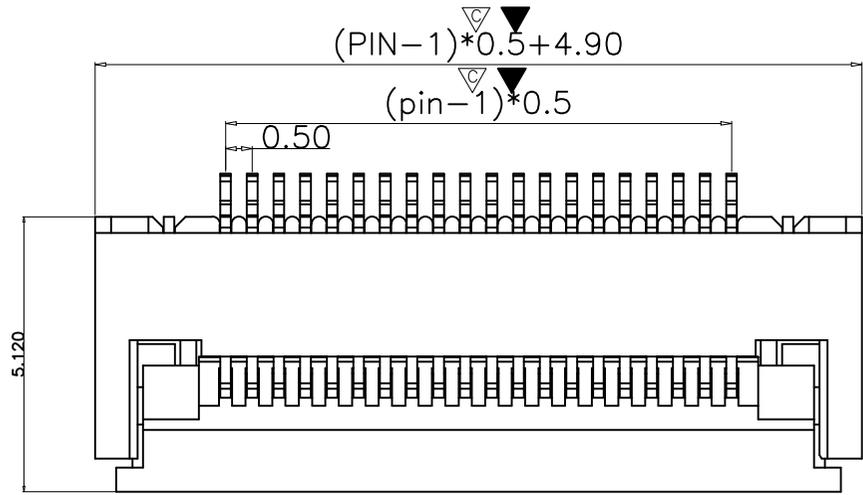


NOTES:

1. MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC UL94V_0, COLOR: BLACK.
CONTACT: COPPER ALLOYS.


2. PLATING:
UNDERPLATE: NICKEL.
CONTACT AREA: TIN OVER NICKEL.

3. MULTIMEDIA CARD COMPATIBLE

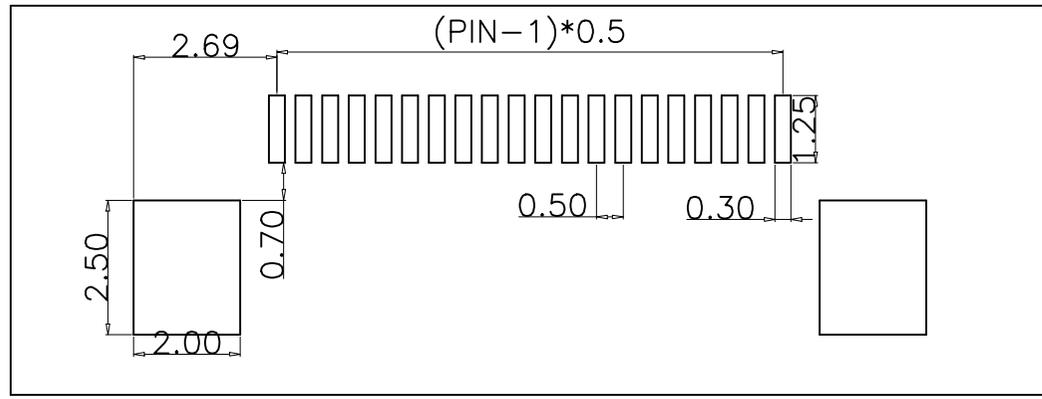




订购需知:

JYS-FPC050-200-0XX

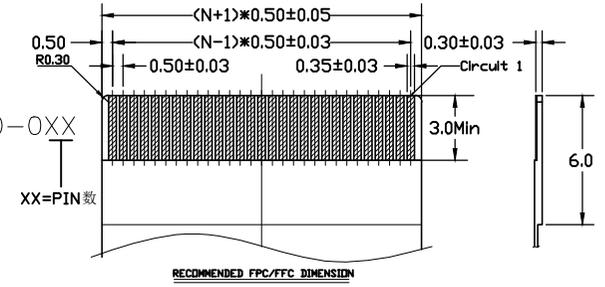

GENERAL TOLERANCE		DWG NO.	JYSA0405-04	APPD:	WIND	Scale	1:1
X. ±0.45	x. ° ±5°	Title	0.5 Pitch H=2.0mm FPC Conn掀盖式	CHKD:		UNIT	mm
.X ±0.35	.x ° ±2°			DR:			
.XX ±0.25	.xx ° ±1°	Part NO.	JYS-FPC050-200-0XX	Date	2018/03/29		
.XXX ±0.15	.xxx ° ±0.5°						
SHEET	1/2			JYSCONN Shenzhen JYSCONN Electronics Co., LTD.			

REV.	ECN. NO.	MODIFY. CONTENT	DATE
A		NEW	2018/03/29

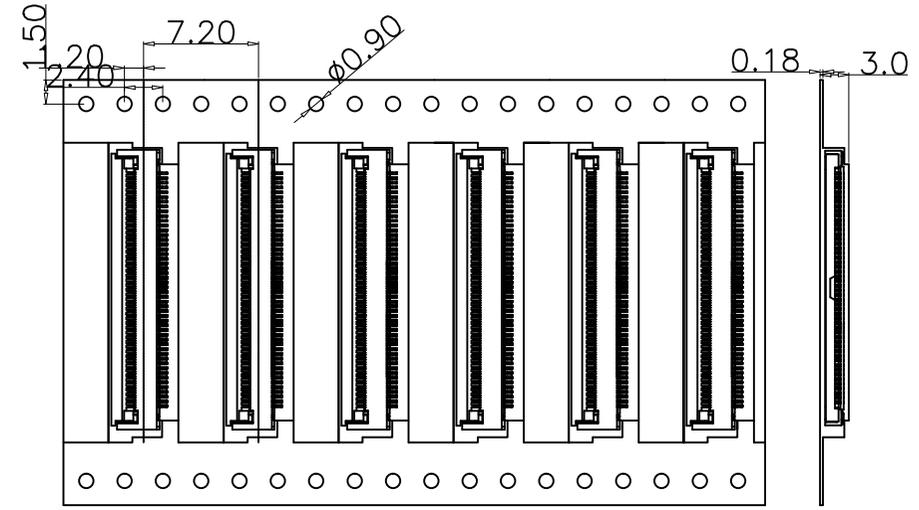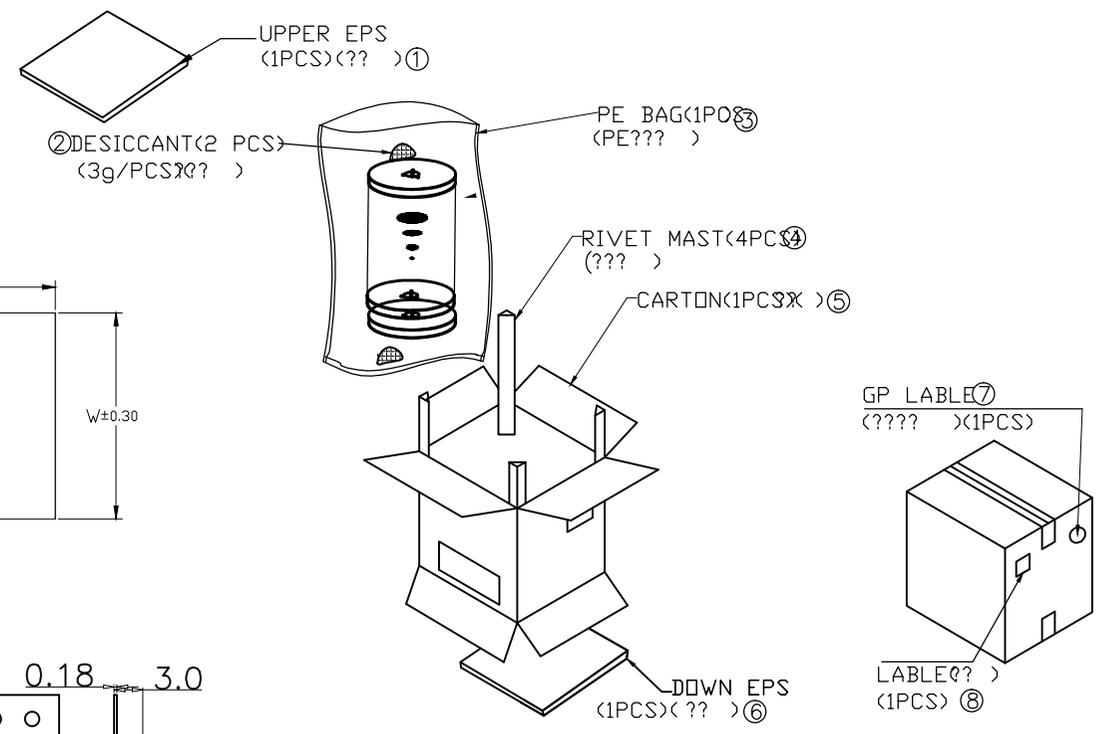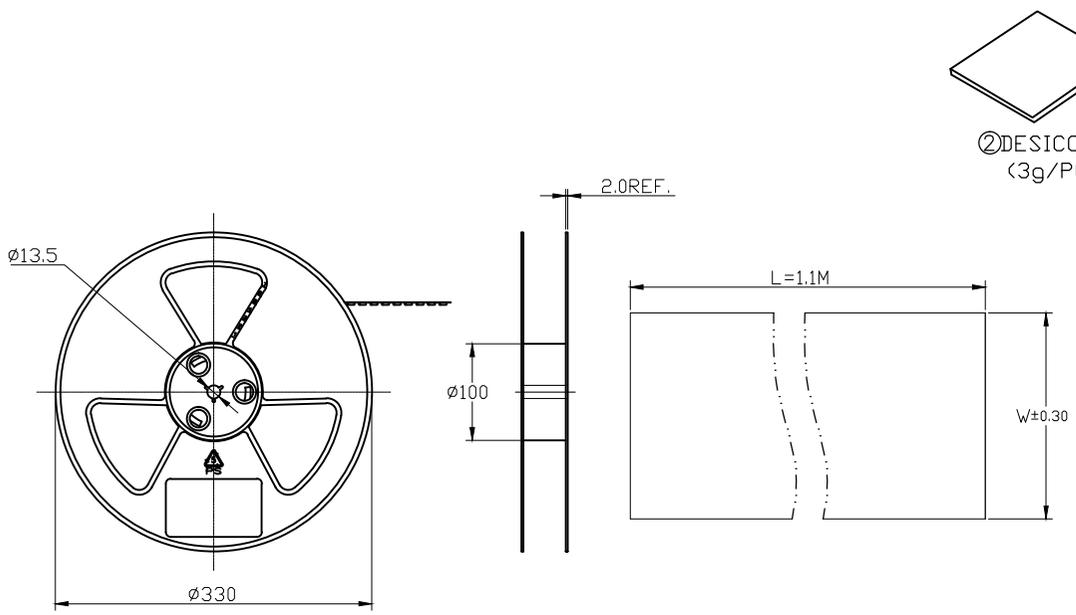

1. 材质要求:
- 1.1 纸箱的材质要求为A=A; 外形尺寸为350*350*340CM;
 - 1.2 卷盘的材质为PVC;
2. 包装要求:
- 1 将卷带放入包装机后, 前空5PCS, 后放产品2000PCS, 再空5PCS; 上带留200MM长度。
 - 2 将包装好的产品从包装机上取下用外带包装好, 盘上贴好标签 将盘装产品放入PE袋内, 放干燥剂, 叠好口部。
 - 3 箱底放入纸板, 把装好PE袋的产品放入箱中, 四角用折叠板塞好, 顶部再放一块纸板
 - 4 封箱, 并在纸箱外贴上标签产品标签, 环保标签。
- 备注:
1. 若有未装满之零数, 必须用泡棉塞满。
 2. 针对于包装方式可根据客户要求包装。

PIN NO.	W	A	B	A0	B0	PCS /REEL	REEL/CARTON	SUM(PCS)
4PIN~8PIN	16	7.5	—	6.4+ (n-4)*0.5 (n=pin no)	5.5	2000	15	60000
9PIN~24PIN	24	11.5	—		5.5	2000	10	40000
25PIN~36PIN	32	14.2	28.4		5.5	2000	8	32000
37PIN~55PIN	44	20.2	40.4		5.5	2000	6	24000
56PIN~60PIN	56	26.2	52.4		5.5	2000	5	20000

GENERAL TOLERANCE		DWG NO.	JYSA0405-04	APPD:	WIND	Scale	1:1
X. ±0.45	x. °±5°	Title	0.5 Pitch H=2.0mm FPC 掀盖式 包装图	CHKD:		UNIT	mm
.X±0.35	.x°±2°			DR:			
.XX±0.25	.xx°±1°	Part NO.	JYS-FPC050-200-0XX	Date	2018/03/29		
.XXX±0.15	.xxx°±0.5°						
SHEET	2/2	JYSCONN Electronics Co., LTD.					