

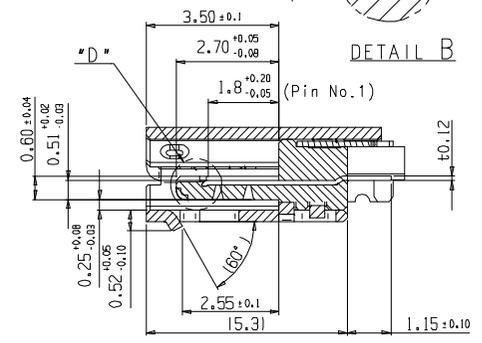
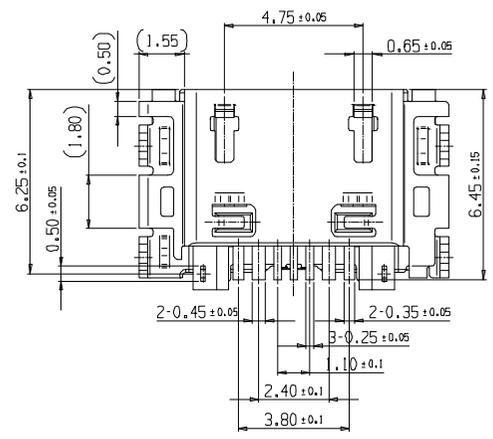


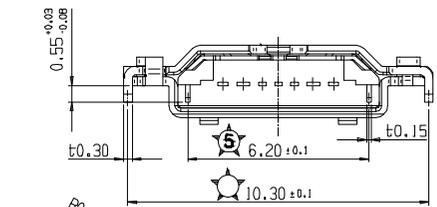
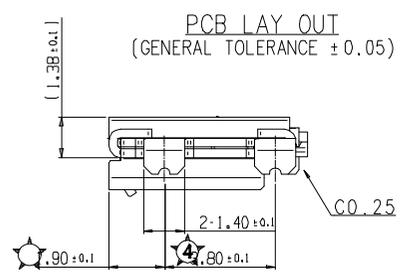
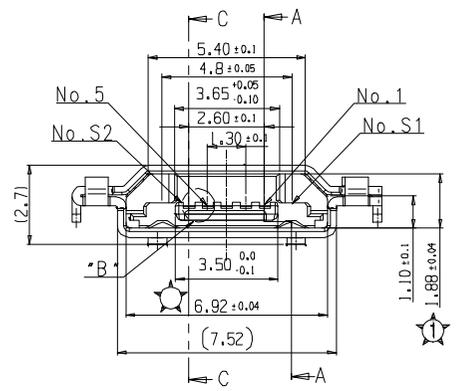
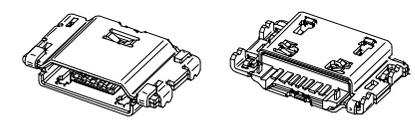
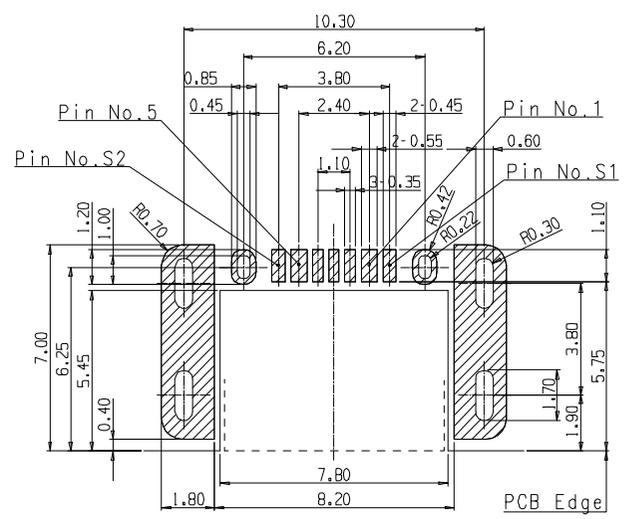


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2019/05/29

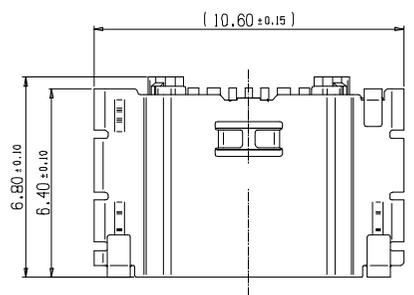

- 一、备注
1、高温热塑性, UL 94 V - 0, 黑色
?、端子材质: 铜合金, 镀镍底镀金
- 二、技术参数
接触电阻: 30 mMax
绝缘阻抗: 1000MΩ Min(500DC)
额定电流: 每个接触件1A Max
额定电压: 30V Max(DC)
耐 压: 500V r.m.s/min
使用温度: -40℃~85℃
寿 命: >10000次

SECTION A-A

GENERAL TOLERANCE		DWG NO.	APPD:	WIND	Scale	1:1
X.±0.45	x.'±5'	Title	CHKD:	Date	UNIT	mm
.X±0.35	.x'±2'		DR:			
.XX±0.25	.xx'±1'	Part NO.	JYS-UMO108-087	2019/05/29		
.XXX±0.15	.xxx'±0.5'					
SHEET	1/1	JYSCONN Electronics Co., LTD.				